

Task Factory Case Transform


Last Modified on 15 August 2022


🔔 Task Factory users running version 2020.1.4 or older (released prior to May 27, 2020): **There's an important Task Factory update.** Please visit [here](#) for more details.

In this article:

- [Case Transform](#)
 - [Actions](#)
 - [Action](#)
 - [Output Action](#)
 - [Parameters](#)


Case Transform

Transform Icon	Transform Description
	The Case and Standardization Transform is a transform that allows the user to format the case of source data using different styles of formatting.

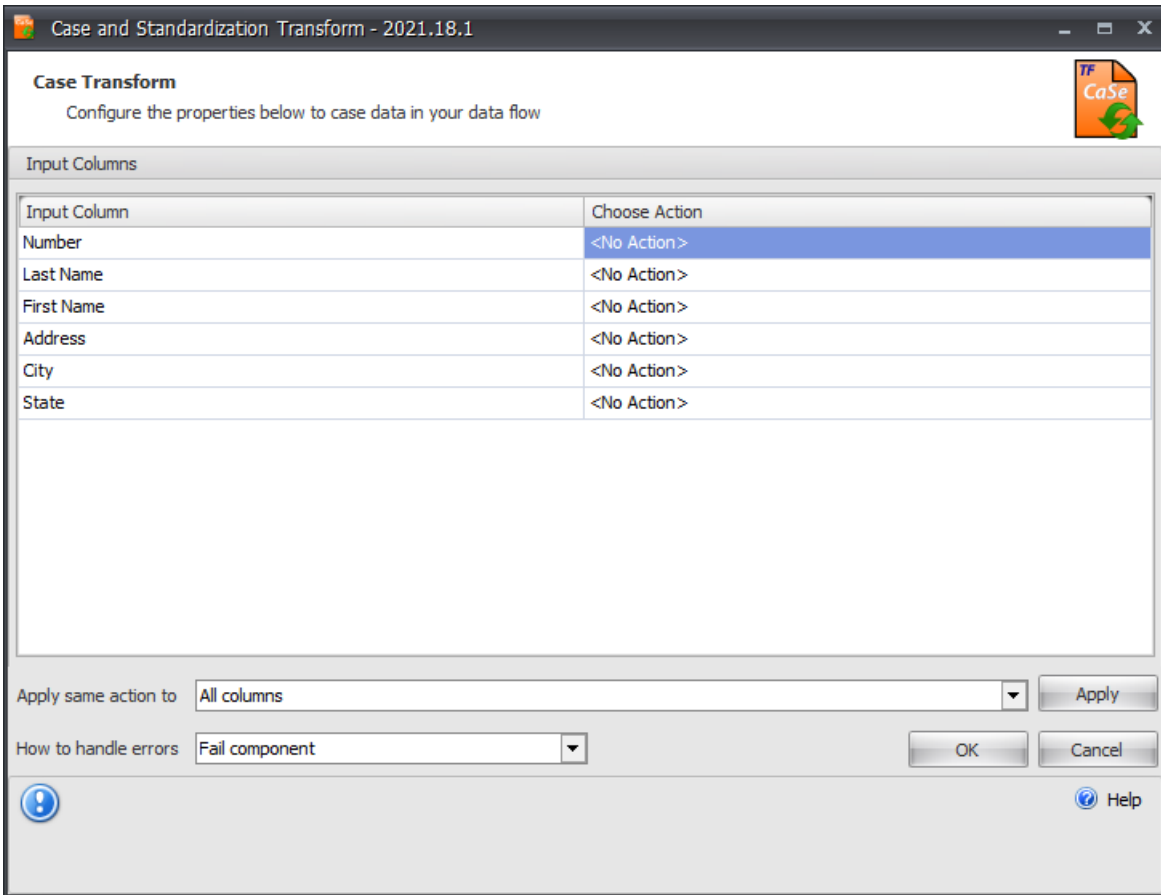

Actions

In the **Choose Action** column, selecting on the **<No Action>** tag displays the choose action drop down menu.

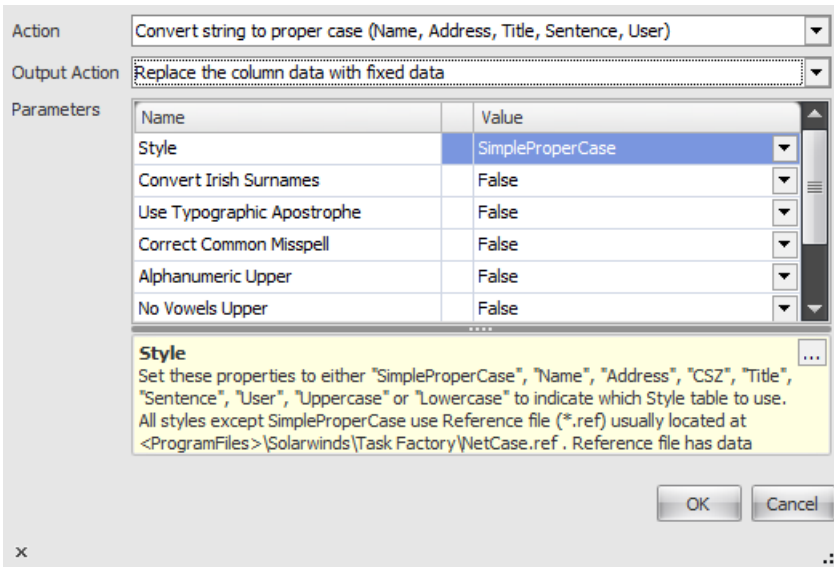

Action

Note: By default no action is selected. Selecting an action opens the parameter options.

Option	Description
Convert string to proper case	This action is used to transform the case of source data.

Output Action

The **Case Transform** has the two output options:

Option	Description
Replace the column data with fixed data	
Output the fixed data to a new output column	If selected, the new output column name is inputcolumn_output . For example, if the source column name is FirstName , the output column is FirstName_output .

Parameters

Note: Parameters become available once an action is selected.

Option	Description
Style	Select the style table to use, when SimpleProperCase is selected then all other parameters are ignored.
Convert Irish Surnames	Set true or false to indicate whether or not to convert Irish surnames. ex. OHARA converts to O'Hara.
Use Typographic Apostrophe	Set this property true or false to indicate whether or not to use the typographic apostrophe in place of the standard apostrophe when converting Irish surnames.
Correct Common Misspell	Set this property true or false to indicate whether or not to correct common misspellings. ex. acn is corrected to can.
Alphanumeric Upper	Set this property true or false to indicate whether or not to convert alphanumeric data to all uppercase.
No Vowels Upper	Set this property true or false to indicate whether or not to convert alphabetic data containing no vowels to all uppercase. ex. mlk converts to MLK.

Option	Description
Ignore Mixed Case	Set this property true or false to indicate whether or not to convert mixed-case text. Use this setting to preserve existing mixed-case text. Text only converts when Text-In string is all uppercase or lowercase.

[🔗](#) **Additional Information:** See the [Task Factory Error Row Handling](#) article for more information about this functionality.